

Close Clearance Pipe

Illustrated Instructions




Appliance Adapter




1. An Appliance Adapter (or reducer, in some instances) is required to attach Close Clearance pipe to the flue collar of the stove

4. Outer crimped end of stovepipe should point away from flue collar on stove

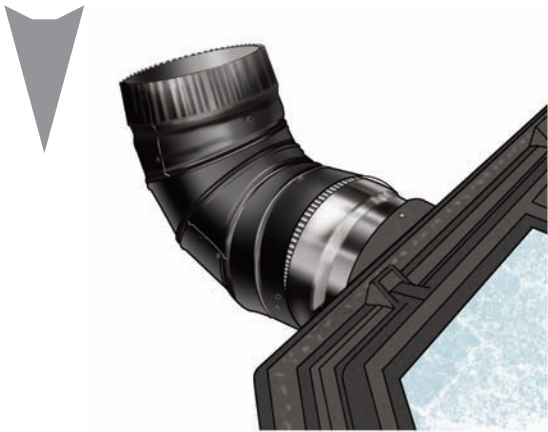

2. Use sheet metal screws to attach Appliance Adapter (or reducer) to the flue collar

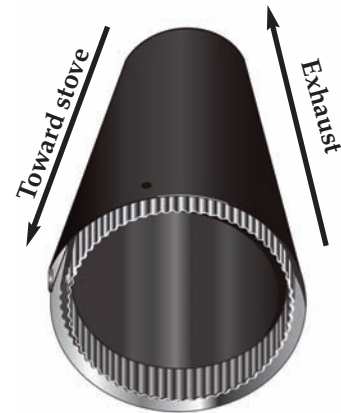

5. Inner crimped end points toward stove



3. First piece of stovepipe will push over Appliance Adapter to meet flue collar. Screw stovepipe to Appliance adapter with sheet metal screws



6. Outer crimped end fits between the two walls of the next piece of pipe and is secured with sheet metal screws.